


lakuaja.com



Lakuaja.com – PT. OPS Sinergi Indonesia

Lakuaja.com adalah situs onlineshop yang berdiri di bawah PT. OPS Sinergi Indonesia. Saat ini menyediakan berbagai kebutuhan elektrik seperti Kabel Supreme, Lampu Philips, Schneider Electric, Legrand, Kabel Tray, Kap Lampu dan aksesoris listrik lainnya.

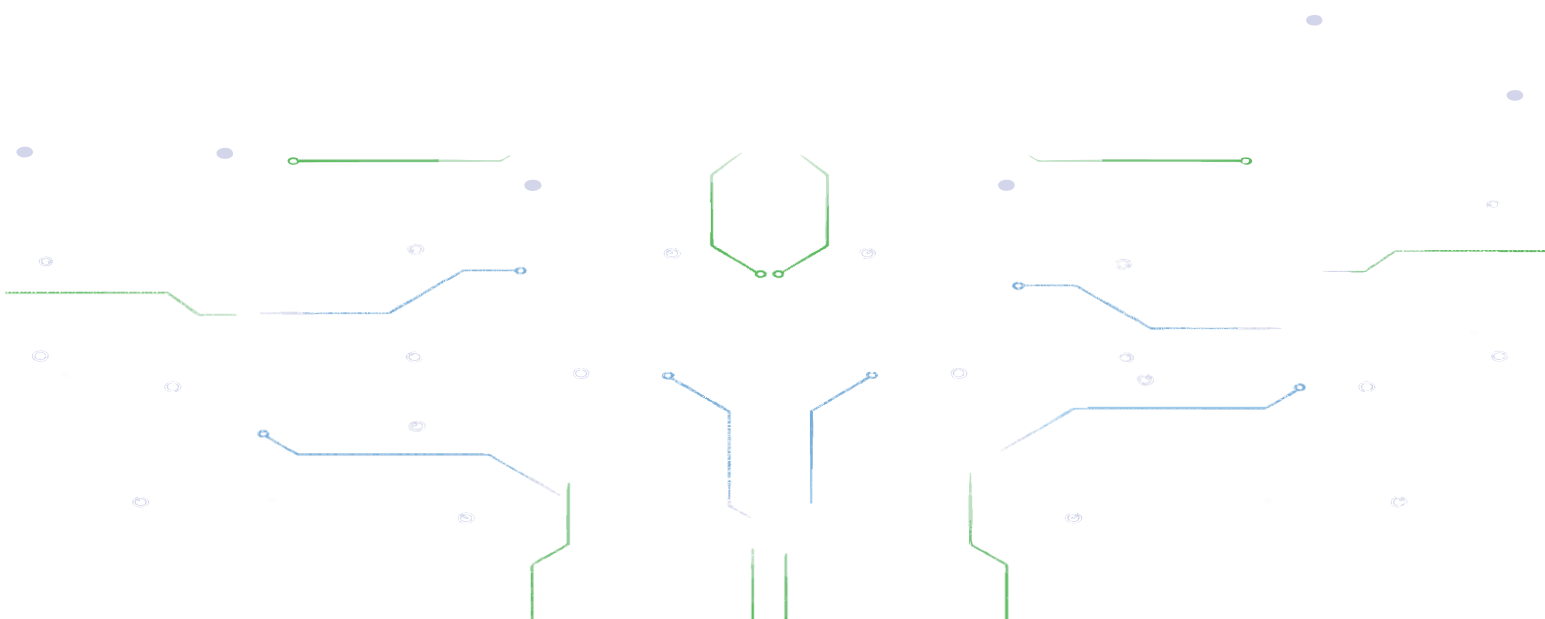



KATALOG KABEL SUPREME

FLEXIBLE CABLE NYHYH 450/750 VOLT

NYHYH 2x0.75 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	0.75	mm ²
Maximum Diameter of Wire	:	0.2	pcs
Insulation	:	0.6	mm
Outer Sheath	:	0.8	mm
Overall Diameter	:	6.3	mm
Net Weight	:	54	Kg/Km
Bending Radius Minimum	:	44	mm
Standart Delivery Length	:	100 or 2.000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	26.0	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	6	A
In Ground	:	0.09	A

NYHYH 2x1.5 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	1.5	mm ²
Maximum Diameter of Wire	:	0.25	pcs
Insulation	:	0.7	mm
Outer Sheath	:	0.8	mm
Overall Diameter	:	7.5	mm
Net Weight	:	82	Kg/Km
Bending Radius Minimum	:	52	mm
Standart Delivery Length	:	100 or 2000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	13.3	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	15	A
In Ground	:	0.17	A



Lakuaja.com



KATALOG KABEL SUPREME

FLEXIBLE CABLE NYHY 450/750 VOLT

NYHY 2x2.5 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	2.5	mm ²
Maximum Diameter of Wire	:	0.25	pcs
Insulation	:	0.8	mm
Outer Sheath	:	1.0	mm
Overall Diameter	:	9.2	mm
Net Weight	:	128	Kg/Km
Bending Radius Minimum	:	65	mm
Standart Delivery Length	:	100 or 2000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	7.98	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	20	A
In Ground	:	0.29	A



KATALOG KABEL SUPREME

FLEXIBLE CABLE NYHYH 450/750 VOLT

NYHYH 3x0.75 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	0.75	mm ²
Maximum Diameter of Wire	:	0.2	pcs
Insulation	:	0.6	mm
Outer Sheath	:	0.8	mm
Overall Diameter	:	6.6	mm
Net Weight	:	64	Kg/Km
Bending Radius Minimum	:	46	mm
Standart Delivery Length	:	100 or 2.000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	26.0	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	6	A
In Ground	:	0.09	A

NYHYH 3x1.5 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	1.5	mm ²
Maximum Diameter of Wire	:	0.25	pcs
Insulation	:	0.7	mm
Outer Sheath	:	0.9	mm
Overall Diameter	:	8.1	mm
Net Weight	:	104	Kg/Km
Bending Radius Minimum	:	57	mm
Standart Delivery Length	:	100 or 2000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	13.3	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	15	A
In Ground	:	0.17	A



KATALOG KABEL SUPREME

FLEXIBLE CABLE NYHYH 450/750 VOLT

NYHYH 3x2.5 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	2.5	mm ²
Maximum Diameter of Wire	:	0.25	pcs
Insulation	:	0.8	mm
Outer Sheath	:	1.1	mm
Overall Diameter	:	10.0	mm
Net Weight	:	161	Kg/Km
Bending Radius Minimum	:	70	mm
Standart Delivery Length	:	100 or 2000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	7.98	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	20	A
In Ground	:	0.29	A

NYHYH 3x4 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	4	mm ²
Maximum Diameter of Wire	:	0.3	pcs
Insulation	:	0.8	mm
Outer Sheath	:	1.1	mm
Overall Diameter	:	11.1	mm
Net Weight	:	217	Kg/Km
Bending Radius Minimum	:	78	mm
Standart Delivery Length	:	2000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	4.95	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C


In Air	:	26	A
In Ground	:	0.46	A



KATALOG KABEL SUPREME

FLEXIBLE CABLE NYYHY 450/750 VOLT

NYHYH 3x6 MM²



DIMENSIONAL & MECHANICAL DATA

Nominal Cross and Sectional Area	:	6	mm ²
Maximum Diameter of Wire	:	0.3	pcs
Insulation	:	0.8	mm
Outer Sheath	:	1.2	mm
Overall Diameter	:	12.4	mm
Net Weight	:	293	Kg/Km
Bending Radius Minimum	:	87	mm
Standart Delivery Length	:	1000	M

ELEKTRIKAL DATA

Resistance at 20 °C

DC Conductor Maximal	:	3.30	Ω/Km
Insulation Minimum	:	50	MΩ/Km

Current Carrying Capacity at 30 °C

In Air	:	33	A
In Ground	:	0.69	A